


# ALL SCADA SW BRANDS




ALL WIRED MEDIA  
RS232 / RS485 / ETH.  
MASTER / SLAVE

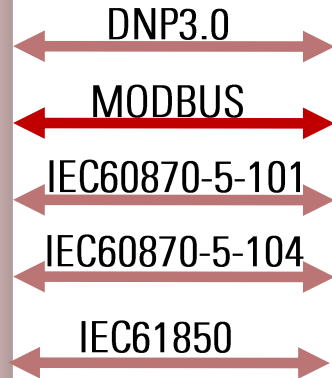


# Gate2MDLC MDLC Front End Processor



OPTIONAL REDUNDANCY  
OPERATING -40°C to +70°C  
12-48VDC / 90-240VAC

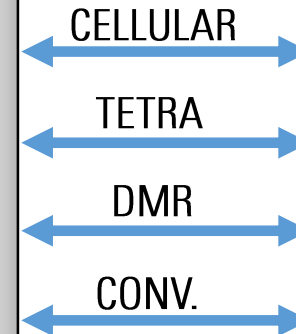

# ALL MOTOROLA RTUs

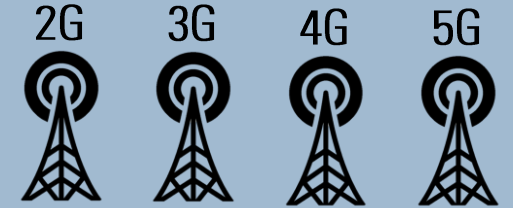

TETRA  
RADIO



CONVENTIONAL  
RADIO



DMR (MOTOTRBO)  
RADIO