



ALL BRANDS



ALL WIRED MEDIA
RS232 / RS485 / ETH.
MASTER / SLAVE

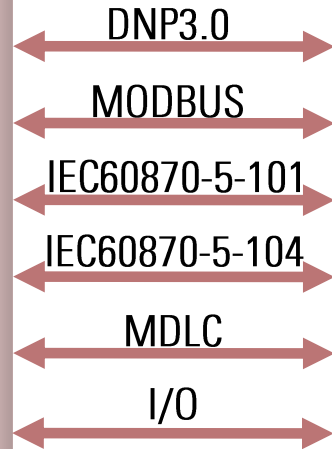


Gate2IEC


IEC61850 SERVER & CLIENT



OPTIONAL REDUNDANCY
OPERATING -40°C to +70°C
12-48VDC / 90-240VAC

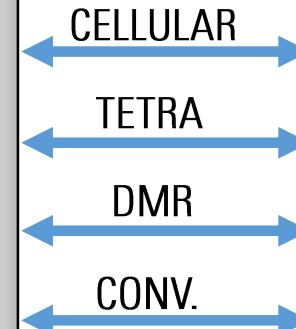

ALL WIRELESS MEDIA

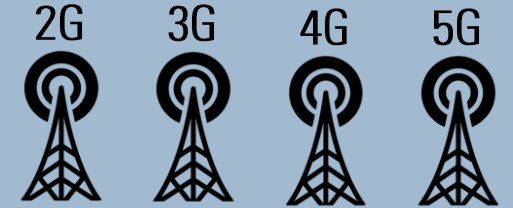

TETRA
RADIO



CONVENTIONAL
RADIO



DMR (MOTOTRBO)
RADIO